

12/21/98  
1558 U.S. PTO

# NOVAKOV ♦ DAVIS

A PROFESSIONAL CORPORATION

2000 ST. PAUL PLACE  
At The Arts District

750 NORTH ST. PAUL  
DALLAS, TEXAS 75201-3286

(214) 922-9221

ATTORNEYS AND  
COUNSELORS

December 21, 1998

1525 U.S. PTO  
09/21/235  
12/21/98  
Telecopier  
(214) 969-7557

Commissioner of Patents  
and Trademarks  
Box Patent Application  
Washington, D.C. 20231

**EXPRESS MAIL RECEIPT NO. EE804530235US**

Re: U.S. Patent Application for "ANTENNA MOUNTING APPARATUS"  
Our File: SAMS01-00059

Dear Sir:

Enclosed please find the following documents for filing:

Express Mail Certificate of Mailing;  
Patent Application (26 pages including cover sheet);  
Informal Drawings (2 sheets);  
Declaration and Power of Attorney;  
Assignment and Recordation Form Cover Sheet;  
a check in the sum of \$800.00 for the application filing fee & Assignment recordal fee; and  
a postcard receipt.

FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE			\$760.00	\$760
TOTAL CLAIMS	20 - 20 =	0	\$ 18.00	\$ 0
INDEP. CLAIMS	2 - 3 =	0	\$ 78.00	\$ 0
MULTIPLE DEPENDENT CLAIM PRESENTED	0		\$260.00	\$ 0

TOTAL \$760.00

Commissioner of Patents  
and Trademarks  
December 21, 1998  
Page 2

If any problems arise in the filing of the enclosed documents, please contact William A. Munck at (214) 922-9221. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Novakov Davis Deposit Account No. 50-0208.

Very truly yours,

NOVAKOV ♦ DAVIS, P.C.

A handwritten signature in black ink, appearing to read "William A. Munck". The signature is fluid and cursive, with a large initial "W" and "M".

William A. Munck

Registration No. 39,308

WAM:tlm  
Enclosures

ATTY. DOCKET NO. SAMS01-00059

PATENT

ANTENNA MOUNTING APPARATUS

Inventor(s) :

James S. Brunson  
18081 Midway Road, #418  
Dallas  
Dallas County  
Texas 75287  
United States Citizen

Hiep X. Nguyen  
6020 Kimberley Court  
Fort Worth  
Tarrant County  
Texas 76137  
United States Citizen

Assignee:

SAMSUNG ELECTRONICS Co., LTD.  
416, Maetan-dong, Paldal-gu  
Suwon-city, Kyungki-do  
Republic of Korea

CERTIFICATE OF EXPRESS MAIL	
I hereby certify that this correspondence, including the attachments listed, is being mailed in an envelope addressed to Commissioner of Patents and Trademarks, Washington, DC 20231, using the Express Mail Post Office to Addressee service of the United States Postal Service on the date shown below.	
<u>TERRI MASSENGALE</u> Printed Name of Person Mailing	<u>EE 804530235US</u> Express Mail Receipt No.
<u>Terri MasseNGale</u> Signature of Person Mailing	<u>December 24, 1998</u> Date

William A. Munck  
John T. Mockler  
Novakov ♦ Davis, P.C.  
750 Saint Paul Street  
Suite 2000  
Dallas, Texas 75201-3286  
(214) 922-9221

**ANTENNA MOUNTING APPARATUS****TECHNICAL FIELD OF THE INVENTION**

5 The present invention is directed, in general, to antenna systems and, more specifically, to an apparatus for easily mounting and adjusting an antenna on a pole or similar fixture.

**BACKGROUND OF THE INVENTION**

10 In recent years there has been a rapid growth in the use of wireless devices, including one-way and two-way pagers, cellular phones, personal communication services (PCS) systems, and personal computers (PCs) equipped with cellular modems or wireless network cards. To support this growth, wireless service providers have dramatically increased the amount and the density of wireless network infrastructure deployed nationwide.

15 The large number of subscribers and the many applications for wireless communications have created a heavy subscriber demand for RF bandwidth. To maximize usage of the available bandwidth, a number of multiple access technologies have been implemented to allow more than one subscriber to communicate simultaneously with

each base transceiver station (BTS) in a wireless system. These multiple access technologies include time division multiple access (TDMA), frequency division multiple access (FDMA), and code division multiple access (CDMA). These technologies assign each system subscriber to a specific traffic channel that transmits and receives subscriber voice/data signals via a selected time slot, a selected frequency, a selected unique code, or a combination thereof.

To further augment the capacity of their wireless networks and provide coverage to greater numbers of subscribers, wireless service providers increasingly are using a larger number of smaller-sized cell sites to cover the same amount of territory. Since each cell site covers a relatively smaller geographical area, each cell site generally also encompasses a smaller number of subscribers, all other things being equal. This allows greater reuse of frequency bands, time slots and codes in FDMA, TDMA and CDMA wireless networks.

However, the use of a larger number of smaller cell sites also increases the infrastructure equipment required by a wireless network. For example, doubling the number of cells sites covering a particular territory generally doubles the number of base transceiver stations, the number of antennas, the number of antenna

poles, and the like.

To offset increased infrastructure equipment requirements, wireless service providers seek to minimize the equipment cost, installation costs, and maintenance costs. The use of standard commodity equipment is encouraged. It also is particularly helpful to use infrastructure equipment that is multi-purpose, adaptable, quickly installed, and easy to disassemble and service.

Much of the antenna equipment that has been installed, however, is inflexible, difficult to maintain, and/or custom-made to fit specific systems. For instance, many base station antennas are mounted on fixed platforms that are rigidly or permanently attached to utility poles. This makes moving, replacing, and/or adjusting the antennas difficult and more expensive.

There is therefore a need in the art for improved antenna mounting equipment that is more adaptable and easier to maintain and adjust. In particular, there is a need for antenna mounting equipment that is simple to attach to, or detach from, a utility pole. More particularly, there is a need for antenna mounting equipment that uses standard parts, but which can be adapted for use with utility poles of varying diameters and cross-sectional shapes.

## SUMMARY OF THE INVENTION

To address the above-discussed deficiencies of the prior art, it is a primary object of the present invention to provide an apparatus for mounting a plurality of antennas on a utility pole.

5 The apparatus comprises 1) a plurality of brackets capable of encircling the utility pole and supporting the plurality of antennas, each of the plurality of brackets comprising a) at least one support arm capable of attaching to a first selected one of the plurality of antennas; and b) a faceplate capable of engaging a  
10 surface of the utility pole; and 2) a plurality of tightening means, each of the tightening means connecting a first selected one of the plurality of brackets and a second selected one of the plurality of brackets, wherein the plurality of tightening means are capable of drawing the plurality of brackets encircling the  
15 utility pole closer together, such that the faceplate of the each of the plurality of brackets is pressed more firmly against the surface of the utility pole.

Accordingly in one embodiment of the apparatus, the plurality of brackets comprise three brackets.

20 In an alternate embodiment of the apparatus, the plurality of brackets comprise four brackets.

In another embodiment of the apparatus, at least a portion of a surface of the faceplate capable of engaging the surface of the utility pole is covered by a layer of rubber.

5 In still another embodiment of the apparatus, at least a portion of a surface of the faceplate capable of engaging the surface of the utility pole is covered by ridges.

In yet another embodiment of the apparatus, at least a portion of a surface of the faceplate capable of engaging the surface of the utility pole is covered by sharp points.

10 In a further embodiment of the apparatus, at least a portion of a surface of the faceplate capable of engaging the surface of the utility pole has a rough texture capable of increasing friction with the surface of the utility pole.

15 In a still further embodiment of the apparatus, each of the plurality of brackets comprises a first support arm and a second arm, wherein the first support arm is capable of attaching to one side of the first selected antenna and the second support arm is capable of attaching to an opposing side of the first selected antenna.

20 In a yet further embodiment of the apparatus, the plurality of tightening means comprise a plurality of bolts.

In another embodiment of the apparatus, the first selected



antenna is adjustably attached to the at least one support arm, such that the first selected antenna may be tilted with respect to the horizon in a plurality of positions.

5 The foregoing has outlined rather broadly the features and technical advantages of the present invention so that those skilled in the art may better understand the detailed description of the invention that follows. Additional features and advantages of the invention will be described hereinafter that form the subject of the claims of the invention. Those skilled in the art should appreciate that they may readily use the conception and the specific embodiment disclosed as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the invention in its broadest form.

15 Before undertaking the DETAILED DESCRIPTION, it may be advantageous to set forth definitions of certain words and phrases used throughout this patent document: the terms "include" and "comprise," as well as derivatives thereof, mean inclusion without limitation; the term "or," is inclusive, meaning and/or; the phrases "associated with" and "associated therewith," as well as derivatives thereof, may mean to include, be included within,

20

interconnect with, contain, be contained within, connect to or with, couple to or with, be communicable with, cooperate with, interleave, juxtapose, be proximate to, be bound to or with, have, have a property of, or the like; and the term "controller" means any device, system or part thereof that controls at least one operation, such a device may be implemented in hardware, firmware or software, or some combination of at least two of the same. It should be noted that the functionality associated with any particular controller may be centralized or distributed, whether locally or remotely. Definitions for certain words and phrases are provided throughout this patent document, those of ordinary skill in the art should understand that in many, if not most instances, such definitions apply to prior, as well as future uses of such defined words and phrases.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, wherein like numbers designate like objects, and in which:

FIGURE 1 illustrates a perspective view of an exemplary multi-sector antenna system according to one embodiment of the present invention; and

FIGURE 2 illustrates an exploded perspective view of an exemplary multi-sector antenna system according to another embodiment of the present invention.

## DETAILED DESCRIPTION

FIGURES 1 and 2, discussed below, and the various embodiments used to describe the principles of the present invention in this patent document are by way of illustration only and should not be construed in any way to limit the scope of the invention. Those skilled in the art will understand that the principles of the present invention may be implemented in any suitably arranged multi-sector antenna.

FIGURE 1 illustrates a perspective view of multi-sector antenna system 20 according to one embodiment of the present invention. Multi-sector antenna system 20 comprises three individual sector antennas, namely antenna 21, antenna 22 and antenna 23, mounted on utility pole 10. Multi-sector antenna system 20 is associated with a single base transceiver station (BTS) that serves a single cell site in a wireless network. Each of antennas 21-23 transmits and receives signals in a specified 120° arc around the cell site.

Antenna 21 is attached to utility pole 10 by means of upper bracket 31 and lower bracket 41. Upper bracket 31 comprises two parts: attachment bracket 31a and faceplate 31b. Lower bracket 41 also comprises two parts: attachment bracket 41a and faceplate 41b.

Attachment bracket 31a comprises two support arms that extend outward from utility pole 10 to support antenna 21. Attachment bracket 31a is removably attached to an upper portion of antenna 21. Attachment bracket 41a also comprises two support arms that extend outward from utility pole 10 to support antenna 21. Attachment bracket 41a is removably attached to a lower portion of antenna 21. Attachment brackets 31a and 41a are fixedly attached to faceplates 31b and 41b, respectively. Faceplates 31b and 41b connect to other faceplates associated with antennas 22 and 23 and are tightened into place to form a strong friction grip against utility pole 10. To increase friction with utility pole 10, the inner surfaces of faceplates 31b and 41b may be rubber coated, or covered by rough ridges or points, similar to the surface of a file or a rasp.

In a similar manner, antenna 22 is attached to utility pole 10 by means of upper bracket 32 and lower bracket 42. Upper bracket 32 comprises attachment bracket 32a and faceplate 32b. Lower bracket 42 comprises attachment bracket 42a and faceplate 42b. Attachment bracket 32a comprises two support arms that extend outward from utility pole 10 to support antenna 22. Attachment bracket 32a is removably attached to an upper portion of antenna 22 and attachment bracket 42a is removably attached to a

lower portion of antenna 22. Faceplates 32b and 42b connect to other faceplates (e.g., faceplates 31b, 41b) associated with antennas 21 and 23 and are tightened into place to form a strong friction grip against utility pole 10. The inner surfaces of faceplates 32b and 42b also may be rubber coated, or covered by sharp ridges and/or points to give it a rough texture.

Finally, antenna 23 is attached to utility pole 10 by means of upper bracket 33 and lower bracket 43 (not visible). Upper bracket 33 comprises attachment bracket 33a and faceplate 33b (not visible). Lower bracket 43 comprises attachment bracket 43a and faceplate 43b (not visible). Attachment bracket 33a is removably attached to an upper portion of antenna 23 and attachment bracket 43a is removably attached to a lower portion of antenna 23. Faceplates 33b and 43b connect to faceplates 31b, 32b, 41b, and 42b on antennas 21 and 22 and are tightened against utility pole 10. As before, the inner surfaces of faceplates 33b and 43b also may be rubber coated, or covered by sharp ridges and/or points to increase friction with utility pole 10.

The upper portion of antenna 21 is attached to attachment bracket 31a by means of a bolt or dowel that is inserted through one of a plurality of holes in attachment bracket 31a and into a corresponding upper side hole in antenna 21. Antenna 21 may be

tilted upward or downward with respect to the horizon by inserting the bolt or dowel through selected holes in attachment bracket 31a. The lower portion of antenna 21 is attached to attachment bracket 41a by means of a bolt or dowel that is inserted through an elongated slot (or hole) in attachment bracket 41a and into a corresponding lower side hole in antenna 21. The bolt in the slot in attachment bracket 41a can slide up and down to accommodate different positions as antenna 21 is tilted up or down by selecting different holes in attachment bracket 31a.

Antennas 22 and 23 may be positioned at different angles of downtilt in attachment brackets 32a, 33a, 42a, and 43a in a manner similar to that described above with respect to antenna 21. To avoid redundancy, further explanation of the tilting operations of antennas 22 and 23 is omitted.

Upper brackets 31, 32, and 33 encircle utility pole 10 and are joined together by means of threaded bolts 51 in the flanges of faceplates 31b, 32b, and 33b. Similarly, lower brackets 41, 42, and 43 encircle utility pole 10 and are joined together by means of threaded bolts 51 in the flanges of faceplates 41b, 42b, and 43b. Antennas 21-23 may be mounted on utility poles 10 of varying diameters by tightening or loosening bolts 51, thereby increasing or decreasing the gaps separating faceplates 31b, 32b, and 33b and

drawing the inner surfaces of faceplates 41b, 42b, and 43b closer together. Tightening the bolts effectively reduces the circumference of any cylinder (i.e., pole) that may be inserted within the inner surfaces of the faceplates 41b, 42b, and 43b.

5           Although three upper brackets 31-33 are used to attach the tops of antennas 21-23 to utility pole 10 and three lower brackets 41-43 are used to attach the bottoms of antennas 21-23 to utility pole 10, different numbers of brackets may be used. For example, utility pole 10 may support four antenna units if the cell site in which utility pole 10 is located is divided into four (4) 90° sectors. In such a case, each antenna unit would be separated by four brackets at the top and four brackets at the bottom. Furthermore, there is no requirement that utility pole 10 have a circular cross-sectional area. For example, if utility pole 10 was hexagonal in its cross-sectional area, upper brackets 31-33 and lower brackets 41-43 may still be used to attach antennas 21-23. If utility pole 10 is square in its cross-sectional area, a system of four upper brackets and four lower brackets may be used to attach four antenna units.

20           FIGURE 2 illustrates an exploded perspective view of exemplary multi-sector antenna system 200 according to another embodiment of the present invention. For the purposes of brevity and clarity in



explaining FIGURE 2, only antenna 23 is shown and described. However, antennas 21 and 22 are mounted on utility pole 10 in a manner similar to antenna 23.

5 In FIGURE 2, the upper brackets and lower brackets used to attach antennas 21-23 are comprised of a single part, rather than two parts. The tops of antennas 21-23 are mounted on utility pole 10 by means of attachment brackets 131-133, each of which has a flat faceplate portion that makes contact with utility pole 10. For example, faceplate segment 177 of attachment bracket 132 makes  
10 contact with utility pole 10 when brackets 131-133 are tightened in place. The inner surface of faceplate segment 177 may be covered by a layer of rubber or by rough ridges or points in order to increase friction with utility pole 10.

15 Similarly, the bottoms of antennas 21-23 are mounted on utility pole 10 by means of attachment brackets 141-143, each of which has a flat faceplate portion that makes contact with utility pole 10. For example, faceplate segment 176 of attachment bracket 142 makes contact with utility pole 10 when brackets 141-143 are tightened in place. The inner surface of faceplate  
20 segment 176 may also be covered by rubber or rough ridges/points in order to increase friction with utility pole 10.

Bolt assemblies, including bolts 145, 146 and 150, are used to

tighten together attachment brackets 131-133 and attachment brackets 141-143. An exploded view is shown of a bolt assembly comprising bolt 150, washers 151-153, and nut 154. Bolt 150 is inserted through slots in attachment brackets 131 and 133. Depending on how large the slots are, bolt 150 may slide outward by varying amounts with respect to utility pole 10 in order to accommodate different pole diameters.

Antenna 23 is mounted on upper attachment bracket 133 and lower attachment bracket 143 by means of bolts 160, 161 and 170 that are inserted through holes 181 in the support arms of upper attachment bracket 133 or through slots 182 in the support arms of lower attachment bracket 143 and then into corresponding sideholes 183 and 184 in antenna 23. The bolt are secured in place with washers 171 and 172.

Antenna 23 may be tilted upward or downward with respect to the horizon by inserting bolts 160 and/or 161 through different ones of holes 181 in upper attachment bracket 133 and then into sideholes 183 in antenna 23. The lower portion of antenna 23 is rotatably mounted on lower attachment bracket 143 by means of bolt 170, which is inserted through slot 182 in lower attachment bracket 143 and into corresponding sidehole 184 in antenna 23. Bolt 170 can slide vertically and rotate in slot 182 to accommodate

different positions as antenna 23 is tilted up or down by selecting different holes 181 in attachment bracket 133.

5 The attachment brackets of the present invention provide a superior means for mounting antennas on a utility pole over the prior art. The attachment brackets accommodate poles of different diameters and may be attached using simple hand tools, such as wrenches. A technician may easily adjust the height at which antennas 21-23 are mounted on utility pole 10 by loosening bolts 145/146/150 in the upper and lower attachment brackets and then sliding the entire assembly up or down to the correct position. A technician also may easily adjust the tilt or antennas 21-23 by removing bolts 160 and 161 in the upper attachment bracket, tilting the antenna(s) to the correct angle, and then reinserting bolts 160 and 166. The present invention also allows the antennas to be tilted independently.

Advantageously, the present invention obviates the need to modify or adapt the utility pole in any way in order to mount antennas thereon. The present invention can be quickly attached to different-sized utility poles that are part of the existing wireless infrastructure or to new utility poles without the need to drill, weld or otherwise alter the poles.

In alternate embodiments of the present invention, bolts 51,

145, 146, and 150 may be replaced by other types of tightening means (or closure means) that secure the attachment brackets to the utility pole. For example, the attachment brackets may be mounted on the utility pole by means of a belt that is threaded through  
5 holes or slots in the attachment brackets and then is tightened, cinched or latched in place, similar to a radiator hose clamp.

Although the present invention has been described in detail, those skilled in the art should understand that they can make various changes, substitutions and alterations herein without departing from the spirit and scope of the invention in its  
10 broadest form.

## WHAT IS CLAIMED IS:

1           1.    An apparatus for mounting a plurality of antennas on a  
2 utility pole, said apparatus for mounting comprising:

3               a plurality of brackets capable of encircling said  
4 utility pole and supporting said plurality of antennas, each of  
5 said plurality of brackets comprising:

6                   at least one support arm capable of attaching to a  
7 first selected one of said plurality of antennas; and

8                   a faceplate capable of engaging a surface of said  
9 utility pole; and

10               a plurality of tightening means, each of said tightening  
11 means connecting a first selected one of said plurality of brackets  
12 and a second selected one of said plurality of brackets, wherein  
13 said plurality of tightening means are capable of drawing said  
14 plurality of brackets encircling said utility pole closer together,  
15 such that said faceplate of said each of said plurality of brackets  
16 is pressed more firmly against said surface of said utility pole.

1           2.    The apparatus for mounting set forth in Claim 1 wherein  
2 said plurality of brackets comprise three brackets.

1           3.    The apparatus for mounting set forth in Claim 1 wherein  
2    said plurality of brackets comprise four brackets.

1           4.    The apparatus for mounting set forth in Claim 1 wherein  
2    at least a portion of a surface of said faceplate capable of  
3    engaging said surface of said utility pole is covered by a layer of  
4    rubber.

1           5.    The apparatus for mounting set forth in Claim 1 wherein  
2    at least a portion of a surface of said faceplate capable of  
3    engaging said surface of said utility pole is covered by ridges.

1           6.    The apparatus for mounting set forth in Claim 1 wherein  
2    at least a portion of a surface of said faceplate capable of  
3    engaging said surface of said utility pole is covered by sharp  
4    points.

1           7.    The apparatus for mounting set forth in Claim 1 wherein  
2    at least a portion of a surface of said faceplate capable of  
3    engaging said surface of said utility pole has a rough texture  
4    capable of increasing friction with said surface of said utility  
5    pole.

1           8.    The apparatus for mounting set forth in Claim 1 wherein  
2    said each of said plurality of brackets comprises a first support  
3    arm and a second support arm, wherein said first support arm is  
4    capable of attaching to one side of said first selected antenna and  
5    said second support arm is capable of attaching to an opposing side  
6    of said first selected antenna.

1           9.    The apparatus for mounting set forth in Claim 1 wherein  
2    said plurality of tightening means comprise a plurality of bolts.

1           10.   The apparatus for mounting set forth in Claim 1 wherein  
2    said first selected antenna is adjustably attached to said at least  
3    one support arm, such that said first selected antenna may be  
4    tilted with respect to the horizon in a plurality of positions.

1 11. An antenna mounting system for mounting a plurality of  
2 antennas on a utility pole, said antenna mounting system  
3 comprising:

4 at least three upper brackets capable of encircling said  
5 utility pole and supporting said plurality of antennas, at least  
6 one of said at least three upper brackets comprising at least one  
7 upper support arm capable of attaching to an upper portion of a  
8 first selected one of said plurality of antennas and a first  
9 faceplate capable of engaging a surface of said utility pole; and

10 at least three lower brackets capable of encircling said  
11 utility pole and supporting said plurality of antennas, at least  
12 one of said three lower brackets comprising at least one lower  
13 support arm capable of attaching to a lower portion of a second  
14 selected one of said plurality of antennas and a second faceplate  
15 capable of engaging said surface of said utility pole; and

16 a plurality of tightening means, a first tightening means  
17 connecting a first of said at least three upper brackets and a  
18 second of said at least three upper brackets and a second  
19 tightening means connecting a first of said at least three lower  
20 brackets and a second of said at least three lower brackets,  
21 wherein said first and second tightening means are capable of  
22 drawing said at least three upper brackets and said at least three



lower bracket, respectively, closer together, such that said faceplate of said each of said at least three upper brackets and said faceplate of said each of said at least three lower brackets are pressed more firmly against said surface of said utility pole.

12. The antenna mounting system set forth in Claim 11 wherein said at least three upper brackets comprise four brackets.

13. The antenna mounting system set forth in Claim 11 wherein said at least three lower brackets comprise four brackets.

14. The antenna mounting system set forth in Claim 11 wherein at least a portion of a surface of said first faceplate and at least a portion of a surface of said second faceplate are covered by a layer of rubber.

15. The antenna mounting system set forth in Claim 11 wherein at least a portion of a surface of said first faceplate and at least a portion of a surface of said second faceplate are covered by ridges.

1           16. The antenna mounting system set forth in Claim 11 wherein  
2 at least a portion of a surface of said first faceplate and at  
3 least a portion of a surface of said second faceplate are covered  
4 by sharp points.

1           17. The antenna mounting system set forth in Claim 11 wherein  
2 at least a portion of a surface of said first faceplate and at  
3 least a portion of a surface of said second faceplate have rough  
4 textures capable of increasing friction with said surface of said  
5 utility pole.

1           18. The antenna mounting system set forth in Claim 11 wherein  
2 each of said at least three upper brackets comprises a first upper  
3 support arm and a second upper support arm, wherein said first  
4 upper support arm is capable of attaching to one side of said upper  
5 portion of said first selected antenna and said second upper  
6 support arm is capable of attaching to an opposing side of said  
7 upper portion of said first selected antenna.


1           19. The antenna mounting system set forth in Claim 11 wherein  
2 each of said at least three lower brackets comprises a first lower  
3 support arm and a second lower support arm, wherein said first  
4 lower support arm is capable of attaching to one side of said lower  
5 portion of said second selected antenna and said second lower  
6 support arm is capable of attaching to an opposing side of said  
7 lower portion of said second selected antenna.

1           20. The antenna mounting system set forth in Claim 11 wherein  
2 said first and second selected antennas are adjustably attached to  
3 said at least one upper support arm and said at least one lower  
4 support arm, respectively, such that said first and second selected  
5 antennas may be tilted with respect to the horizon in a plurality  
6 of positions.

## ANTENNA MOUNTING APPARATUS

## ABSTRACT OF THE DISCLOSURE

There is disclosed an apparatus for mounting antennas on a utility pole. The apparatus comprises a group of brackets that encircle the utility pole and support the antennas. Each bracket comprises at least one support arm capable of attaching to an antenna and a faceplate that presses against the surface of the utility pole. The apparatus also includes tightening or closure means, such as nut and bolt assemblies, that connect the brackets together. When tightened, the tightening means draw the brackets encircling the utility pole closer together, thereby pressing the faceplates of each bracket more firmly against the utility pole. This clamps the apparatus tightly in place at selected points on the utility pole.



1

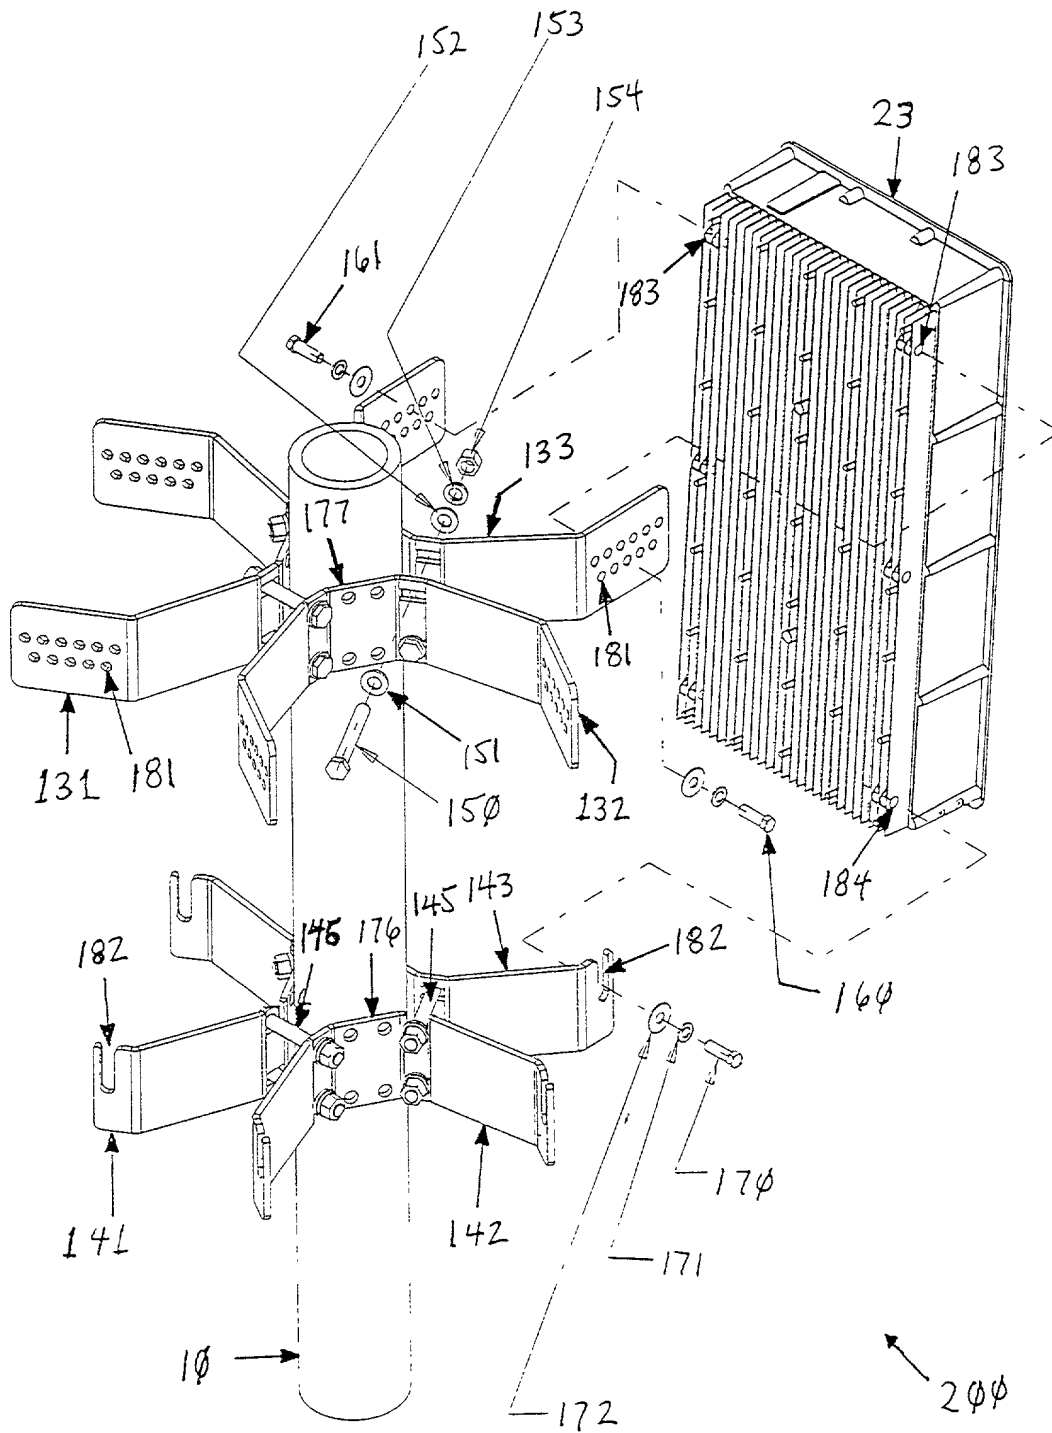


FIGURE 2

DECLARATION AND POWER OF ATTORNEY

As a below named joint inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention, design or discovery entitled:

"ANTENNA MOUNTING APPARATUS"

the specification of which is attached hereto.

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability of this application as defined by Title 37, Code of Federal Regulations, § 1.56.

I hereby claim no foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate on which priority is claimed.

I hereby claim no benefit under Title 35, United States Code, § 120 of any United States application. I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in § 1.56 which became available between the filing date of any prior application(s) and the national or PCT international filing date of this application.

I hereby appoint:

John C. Han, Registration No. 41,403

of SAMSUNG TELECOMMUNICATIONS AMERICA, INC., and

William A. Munck, Registration No. 39,308  
John T. Mockler, Registration No. 39,775

all of the firm of NOVAKOV ♦ DAVIS, P.C. my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities under the Patent Cooperation Treaty.

Send correspondence to: William A. Munck, Esq.  
NOVAKOV ♦ DAVIS, P.C.  
2000 St. Paul Place  
750 North St. Paul Street  
Dallas, Texas 75201-3286

Direct telephone calls to: William A. Munck, Esq.  
(214) 922-9221

Atty. Docket No.: SAMS01-00059

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of first inventor: James S. Brunson

Inventor's signature: JS Brunson

Date: 11/24/98

Residence (City, County, State): Dallas, Dallas County, Texas

Citizenship: U.S.

Post Office Address: 18081 Midway Road, #418  
Dallas, Texas 75287



Inventor's signature: Heptinger

Residence (City, County, State): Fort Worth, Tarrant County, Texas

Post Office Address: 6020 Kimberley Court  
Fort Worth, Texas 76137